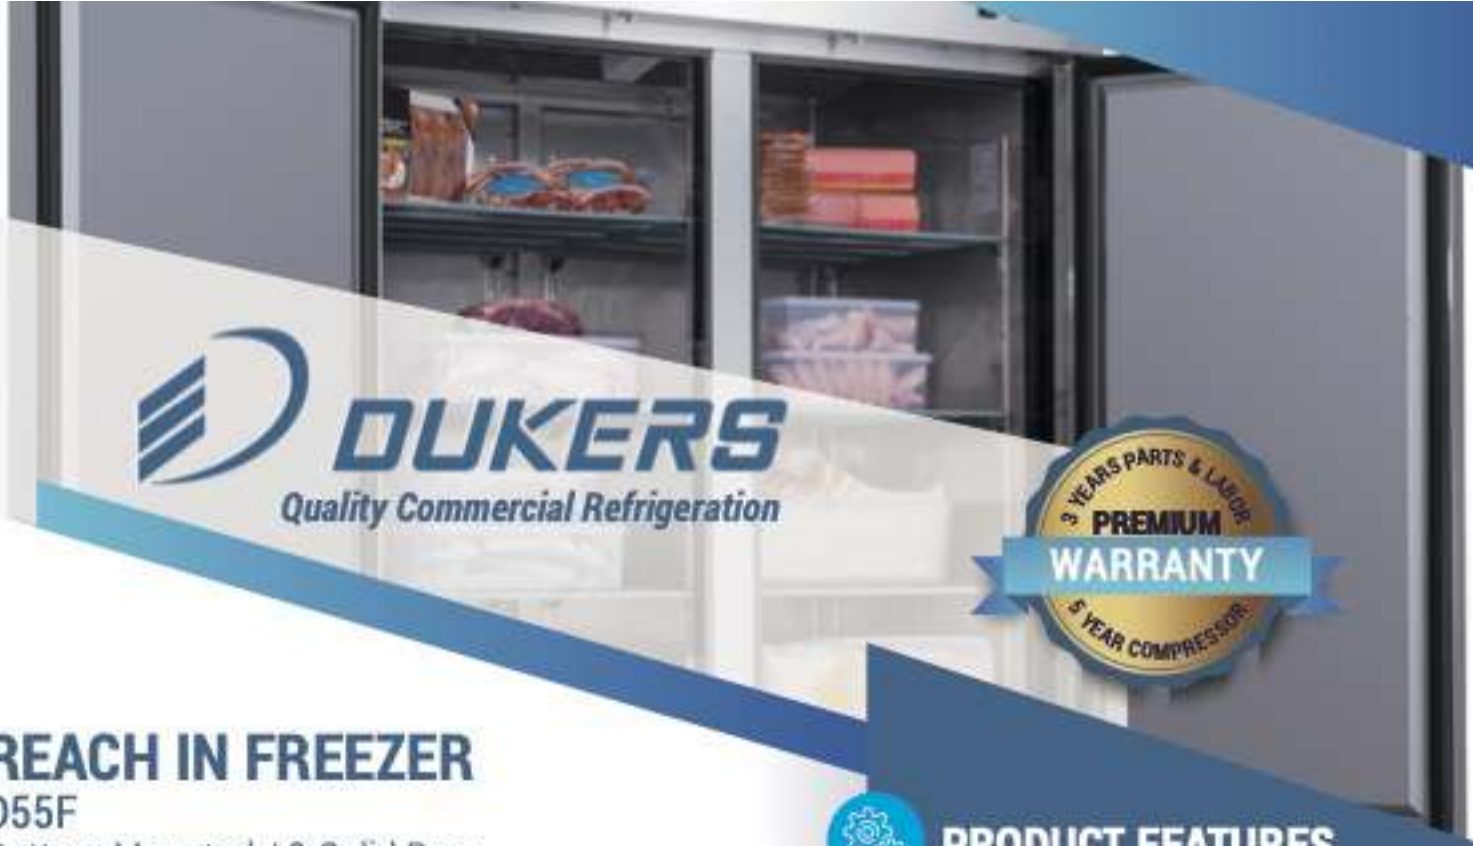


DUKERS

Quality Commercial Refrigeration

3 YEARS PARTS & LABOR
PREMIUM
WARRANTY
5 YEAR COMPRESSOR

REACH IN FREEZER

D55F

Bottom Mounted / 2-Solid Door





TECHNICAL SPECIFICATIONS

Voltage/Frequency	115V/60Hz
Refrigerant	R290
Type of Defrost	Automatic
Interial Material	Stainless Steel
Exterior Material	Stainless Steel
Temperature Range °F	0 ~ -8°F
Compressor Power (HP)	1-
Nema Config.	NEMA5-15P

PRODUCT FEATURES

- The compressor is mounted in the bottom for better heat evaporation.
- Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 0 to -8 degrees Fahrenheit
- Self closing doors with stay open feature.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.

HIGH QUALITY STAINLESS STEEL & **ROBUST DESIGN**

DUKERS

Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628


info@dukersusa.com

www.DukersUSA.com

DETAILS & SPECIFICATIONS

D55F

Front View

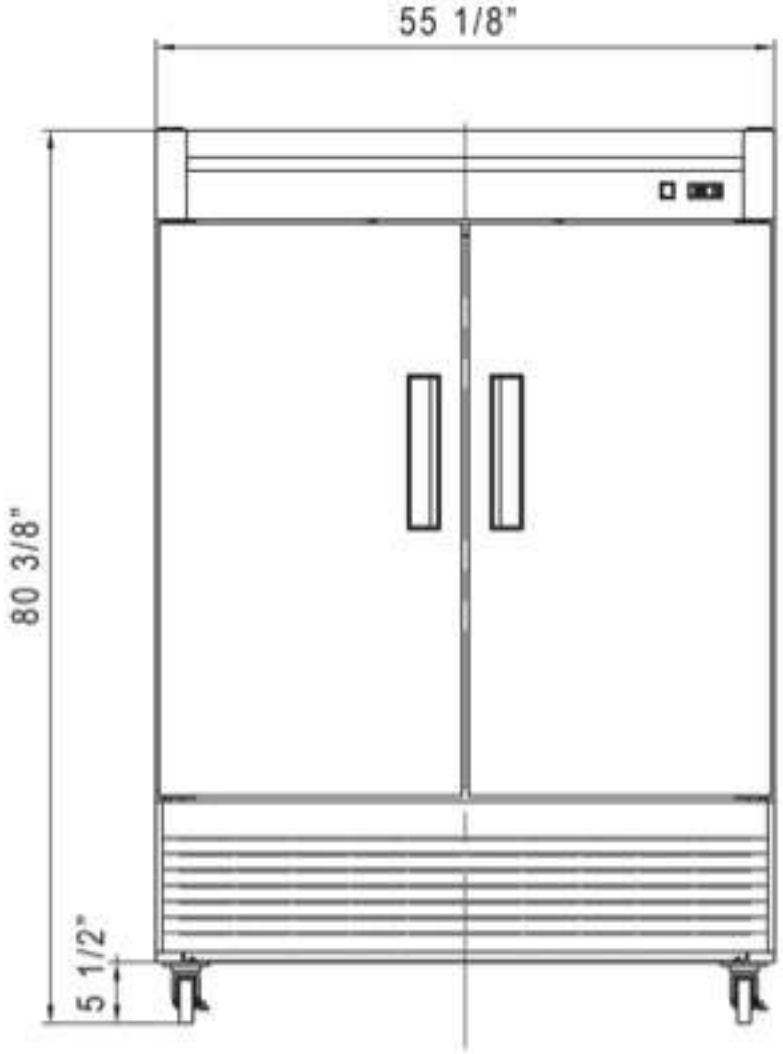

Side View



MODEL D55F	
Rated Voltage	115V
Rated Frequency	60Hz
Total Input Power	1250W
Total Current	11.8 A
Total Capacity	40.74 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290/5.11 oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
D55F	55 1/8 x 32 5/8 x 80 3/8	57 1/8 x 34 5/8 x 82 3/8	463 lbs	8	21

NATURAL REFRIGERANT · PROUD MEMBER CFESA · AutoQuotes · Intertek · Intertek · 115/60/1 NEMA-5-15P

DUKERS
Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey
1-800-931-8628
info@dukersusa.com
www.DukersUSA.com