



4184 E. Conant St.  
Long Beach, CA 90808  
Tel. 888-900-1002  
Fax. 310-900-1088  
[www.turboairinc.net](http://www.turboairinc.net)

Project :

Model # :

Item # :

Qty :

Approval :

## Extended Thin Profile Coil


**Model : TTA130AE(OX, NX, OM, NM)**



### FEATURES / BENEFITS



Blue Anti-Corrosion  
Hydrophobic Coated Fin.  
Air Pass Guard for Better  
Efficiency.



Inner Groove Copper Tube  
for Maximum Coil Efficiency.  
Mounted TXV, Solenoid,  
Thermostat(Optional).

#### MODEL CAPACITY

- Air Defrost Coil: 5600(2 Fan) ~ 17500BTU(6 Fan)
- Electric Defrost Coil: 4900(2 Fan) ~ 13800BTU(6 Fan)

# Extended Thin Profile Coil

**Model : TTA130AE(0X, NX, OM, NM)**

## TTA AIR DEFROST MODEL 60HZ WITH EC MOTOR (DUAL SPEED)

| Capacity (R-404A)                 |       |                                  |       | Capacity (R-448A / R-449A)        |       |                                  |       | Fan Data |      |     |
|-----------------------------------|-------|----------------------------------|-------|-----------------------------------|-------|----------------------------------|-------|----------|------|-----|
| 10°F / 6°C TD<br>25°F / - 4°C SST |       | 14°F / 8°C TD<br>21°F / -6°C SST |       | 10°F / 6°C TD<br>25°F / - 4°C SST |       | 14°F / 8°C TD<br>21°F / -6°C SST |       | CFM/m³H  |      | No. |
| BTUH                              | Watts | BTUH                             | Watts | BTUH                              | Watts | BTUH                             | Watts |          |      |     |
| 13053                             | 3823  | 19151                            | 5609  | 13014                             | 3812  | 19086                            | 5590  | 2231     | 3791 | 3   |

| EC Motor Data |               |       | Connections (Inches) |         |           |         | Approx.<br>Net Weight<br>(Lbs. / Kg) | AWEF Value |                    |
|---------------|---------------|-------|----------------------|---------|-----------|---------|--------------------------------------|------------|--------------------|
| 115V 1Ph 60Hz |               |       |                      |         |           |         |                                      | R-404A     | R-448A<br>/ R-449A |
| HP            | Total<br>Amps | Watts | COIL<br>INLET        | SUCTION | EQUALIZER | DRAIN   |                                      |            |                    |
| 1/25          | 2.25          | 75    | 1/2 OD               | 5/8 ID  | 1/4 OD    | 3/4 MPT | 61 / 28                              | 9.00       | 9.00               |

| No.<br>of Fans | Dimensions (Inches / mm) |             |   |   |
|----------------|--------------------------|-------------|---|---|
|                | A                        | B           | C | D |
| 3              | 69.4 (1764)              | 60.6 (1539) | - | - |

Design and specifications subject to change without notice

TTA130AEOX: R404A TXV "SBFSE-A-C" (Inlet: 3/8", Outlet: 1/2") Pre-installed

TTA130AENX: R448A/R449A TXV "SBFDE-A-C" (Inlet: 3/8", Outlet: 1/2") Pre-installed


TTA130AEOM: R404A TXV "SBFSE-A-C" (Inlet: 3/8", Outlet: 1/2") & LLSV "E3S130" (3/8") Pre-installed

TTA130AENM: R448A/R449A TXV "SBFDE-A-C" (Inlet: 3/8", Outlet: 1/2") & LLSV "E3S130" (3/8") Pre-installed


■ **WARRANTY : 1 Year Fan Motor and Parts Warranty**

## PLAN VIEW

(unit : inch)

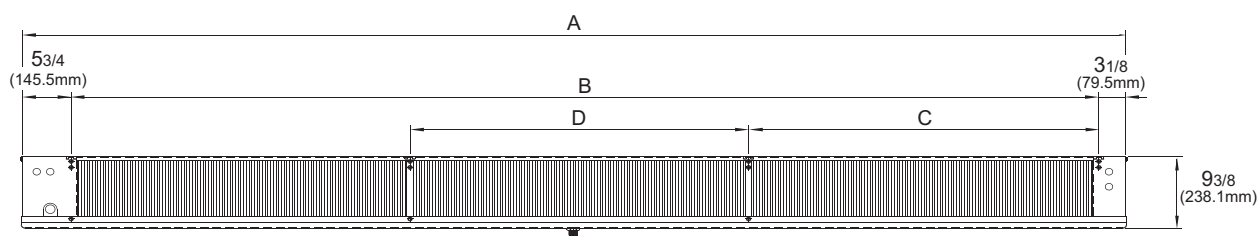

FRONT VIEW

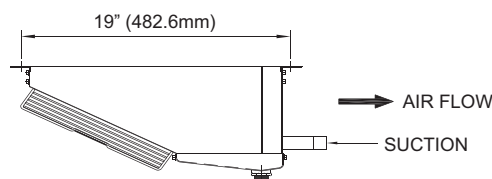

RIGHT SIDE VIEW



■ Toll Free: 888-900-1002

**Turbo air**

**GERMAN KNIFE**

**RADIANCE**

**Turbo air**

**texaking**

"Subject to change without notice" will allow Turbo Air to not be liable for small changes such as amperage, size or any other issue that someone would blame on us.